

## :: TB100185 series Through Bore Slip Rings

### Features

Continuous transmission of power and/or signal under 360° unrestrained rotation. Applies advanced fiber brush technology, free of maintenance or lubricating oil. Multi contact points in each circuit, low contact pressure, low noise, low contact wear; extremely long life-time. Standardized & modularized design; customized solutions also available.



**TB100185 Slip Rings**

[Online Chat](#)

### Options(On your request)

Voltage/current Rated Speed Operating temperature Number of circuits  
Housing material and color Outline dimension Special lead wire Lead exit location Lead length IP class Terminal type


### Part Instruction:

<b>TB</b> : Through Bore	<b>100</b> : Bore Size 100mm	<b>185</b> : OD 185mm	<b>P</b> : Power Circuits	<b>0610</b> : 6Circuits, 10A/Circuit	<b>S</b> : Signal(5A)	<b>12</b> : 12 circuitsXSignal(5A)
--------------------------	------------------------------	-----------------------	---------------------------	--------------------------------------	-----------------------	------------------------------------

### Specifications

Circuits	2~96	Voltage	P:800V / S:240VDC/VAC
Max Speed	300RPM	Contact material	Precious Metal:Gold-Gold
Housing Material	Aluminium Alloy	Torque	0.05N.m;+0.03N.m/6rings
Electrical noise	<5mOhm	Contact Resistance	<2mOhm
Dielectric strength	800VDC@50Hz	Lead Wire	Teflon AWG22(5A),AWG17(10A)
Insulation resistance	1000MΩ@600VDC	Lead Lengths	300mm(12")
Operating Temp.	-40°C to 80°C	Storage Temp.	-55°C to 85°C
Bearing.	Deep groove ball	Protection	IP51

### Drawings

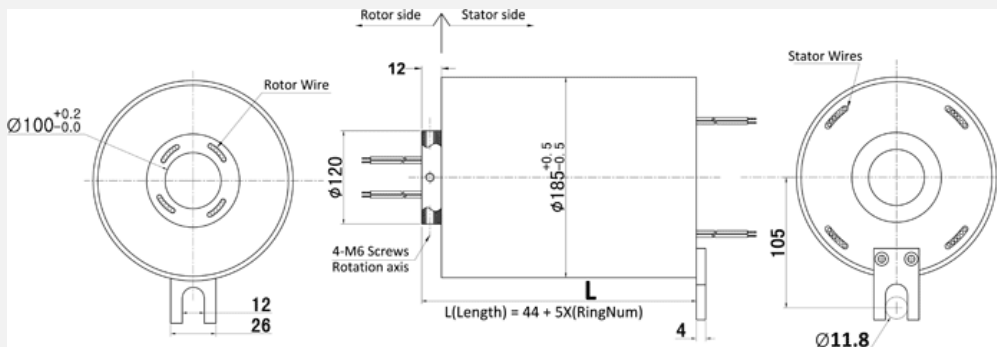

### Standard Parts# in stock

Part#	10A	Signal(5A)	L(mm) - Length (L=44+5 X RingNum)
TB100185-P0210	2	0	54mm
TB100185-S02	0	2	54mm
TB100185-P0310	3	0	59mm
TB100185-P0210-S02	2	2	64mm
TB100185-P0610	6	0	74mm
TB100185-P0210-S04	2	4	74mm
TB100185-P0310-S03	3	3	74mm
TB100185-P0410-S02	4	2	74mm
TB100185-S06	0	6	74mm

TB100185-B1210	12	12	104mm
TB100185-P0210-S10	2	10	104mm
TB100185-P0410-S08	4	8	104mm
TB100185-P0610-S06	6	6	104mm
TB100185-P0810-S04	8	4	104mm
TB100185-P1810	18	0	134mm
TB100185-S18	0	18	134mm
TB100185-P0210-S16	2	16	134mm
TB100185-P0610-S12	6	12	134mm
TB100185-P1210-S06	12	6	134mm
TB100185-P2410	24	0	164mm
TB100185-S24	0	24	164mm
TB100185-P0410-S20	4	20	164mm
TB100185-P0610-S18	6	18	164mm
TB100185-P1210-S12	12	12	164mm
TB100185-P1810-S06	18	6	164mm
TB100185-P3010	30	0	194mm
TB100185-S30	0	30	194mm
TB100185-P0610-S24	6	24	194mm
TB100185-P1210-S18	12	18	194mm
Part#	10A	Signal(5A)	L(mm) - Length (L=44+5 X RingNum)
TB100185-S36	0	36	224mm
TB100185-P0610-S30	6	30	224mm
TB100185-P1210-S24	12	24	224mm
TB100185-P2410-S12	24	12	224mm
TB100185-S42	0	42	254mm
TB100185-P0610-S36	6	36	254mm
TB100185-S48	0	48	284mm
TB100185-P0610-S42	6	42	284mm
TB100185-P1210-S36	12	36	284mm
TB100185-P2410-S24	24	24	284mm
TB100185-S60	0	60	344mm
TB100185-P1210-S48	12	48	344mm
TB100185-P1810-S42	18	42	344mm
TB100185-P2410-S36	24	36	344mm
TB100185-S72	0	72	404mm
TB100185-P1210-S60	12	60	404mm
TB100185-P2410-S48	24	48	404mm
TB100185-P3610-S36	36	36	404mm
TB100185-S84	0	84	464mm
TB100185-P1210-S72	12	60	464mm
TB100185-P2410-S60	24	48	464mm
TB100185-P3610-S48	36	36	464mm
TB100185-S96	0	96	524mm
TB100185-P1210-S80	12	80	524mm
TB100185-P2410-S72	24	72	524mm
TB100185-P3610-S60	36	60	524mm
TB100185-P4810-S48	48	48	524mm

If used for servo motor power, encoder signal and devicenet, profinet, canbus, profibus ... and so on,  
 If used for IP65 or IP68, high temperature 250 degree, specified connectors, shielding cables, Large Current...  
 please contact our technical team for details: [info@rionsr.com](mailto:info@rionsr.com)

### Color Code Seq

6 colors for one group, indicated with number code pipe.

Lead wire Color codes						
Rings#	1	2	3	4	5	6
Color	BLK	RED	YEL	GRN	BLU	WHT

### Typical applications

Industrial machinery-machining centers, rotary index table Heavy equipment turrets, cable reels, test equipments Packaging machines, palletizing machines, magnetic clutch, process equipment Rotary sensors, emergency lighting, robotics Exhibit/display equipment, medical equipment

### Customized on your request

If you don't see what you want in this website, let us know; we may already have it designed or we will modify a design to meet your requirements. In many cases the specifications in the catalog can be changed to include bore size, circuits number, higher current/voltage, flange, lead wire length, shielding, connectors, higher speed, IP68, military grade, higher temperature, mixed with pneumatic/hydraulic capability. Please ask if you don't see exactly what you need as only a small fraction of our Rion slip rings are included in this catalog!

For a detailed outline drawing/3D modal files of a specific model number, or to request a quotation, please contact your local sales representative or send an email to [sales@rionsr.com](mailto:sales@rionsr.com)