

:: TB1256 series Through Bore Slip Rings

Features

Continuous transmission of power and/or signal under 360° unrestrained rotation Applies advanced fiber brush technology, free of maintenance or lubricating oil Multi contact points in each circuit, low contact pressure, low noise, low contact wear; extremely long life-time Standardized & modularized design; customized solutions also available



TB1256 Slip Rings

[Online Chat](#)

Options(On your request)

Voltage/current Rated Speed Operating temperature Number of circuits
Housing material and color Outline dimension Special lead wire Lead exit location Lead length IP class Terminal type


Part Instruction:

TB: Through Bore	12: Bore Size 12.7mm	56: OD 56mm	P: Power Circuits	0610: 6Circuits, 10A/Circuit	S: Signal(5A)	12: 12 circuitsXSignal(5A)
-------------------------	-----------------------------	--------------------	--------------------------	-------------------------------------	----------------------	-----------------------------------

Specifications

Circuits	2-48	Voltage	P:440V / S:240VDC/VAC
Max Speed	800RPM	Contact material	Precious Metal:Gold-Gold
Housing Material	Aluminium Alloy	Torque	0.05N.m;+0.03N.m/6rings
Electrical noise	<5mOhm	Contact Resistance	<2mOhm
Dielectric strength	800VDC@50Hz	Lead Wire	Teflon AWG22(5A),AWG17(10A)
Insulation resistance	1000MΩ@600VDC	Lead Lengths	300mm(12")
Operating Temp.	-40° C to 80° C	Storage Temp.	-55° C to 85° C
Bearing.	Deep groove ball	Protection	IP51

Drawings

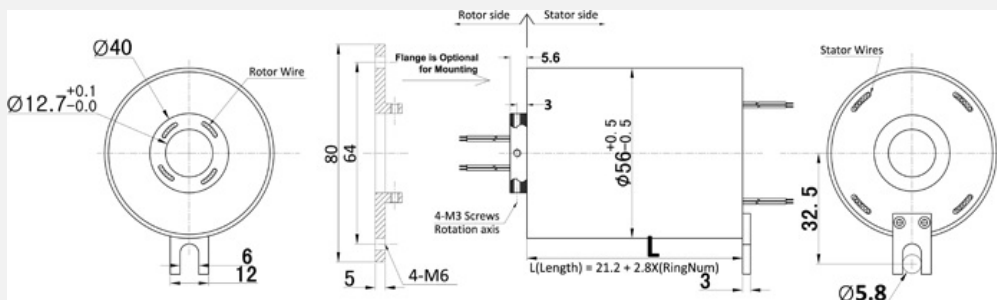

Standard Parts# in stock

Part#	10A	Signal(5A)	L(mm) - Length (L=21.2+2.8 X RingNum)
TB1256-P0210	2	0	26.8mm
TB1256-S02	0	2	26.8mm
TB1256-P0310	3	0	29.6mm
TB1256-P0210-S02	2	2	32.4mm
TB1256-P0610	6	0	38mm
TB1256-P0210-S04	2	4	38mm
TB1256-P0310-S03	3	3	38mm
TB1256-P0410-S02	4	2	38mm
TB1256-S06	0	6	38mm
TB1256-P1210	12	0	54.8mm
TB1256-S12	0	12	54.8mm

TB1256-P0210-S10	2	10	54.8mm
TB1256-P0410-S06	4	6	54.8mm
TB1256-P0810-S04	8	4	54.8mm
TB1256-P1810	18	0	71.5mm
TB1256-S18	0	18	71.5mm
TB1256-P0210-S16	2	16	71.5mm
TB1256-P0610-S12	6	12	71.5mm
TB1256-P1210-S06	12	6	71.5mm

Part#	10A	Signal(5A)	L(mm) - Length (L=24.5+3.4 X RingNum)
TB1256-S24	0	24	88.4mm
TB1256-P0410-S20	4	20	88.4mm
TB1256-P0610-S18	6	18	88.4mm
TB1256-P1210-S12	12	12	88.4mm
TB1256-P1810-S06	18	6	88.4mm
TB1256-S30	0	30	105.2mm
TB1256-P0610-S24	6	24	105.2mm
TB1256-P1210-S18	12	18	105.2mm
TB1256-S36	0	36	122mm
TB1256-P0610-S30	6	30	122mm
TB1256-P1210-S24	12	24	122mm
TB1256-S42	0	42	138.8mm
TB1256-P0610-S36	6	36	138.8mm
TB1256-S48	0	48	155.6mm
TB1256-P0610-S42	6	42	155.6mm

If used for servo motor power, encoder signal and devicenet,profinet,canbus,profibus ... and so on,
 If used for IP65 or IP68, high temperature 250 degree,specified connectors,shielding cables,...
 please contact our technical team for details: info@rionsr.com

Color Code Seq

6 colors for one group,indicated with number code pipe.

Lead wire Color codes						
Rings#	1	2	3	4	5	6
Color	BLK	RED	YEL	GRN	BLU	WHT

Typical applications

Industrial machinery-machining centers, rotary index table Heavy equipment turrets, cable reels, test equipments Packaging machines, palletizing machines, magnetic clutch, process equipment Rotary sensors, emergency lighting, robotics Exhibit/display equipment, medical equipment

Customized on your request

If you don't see what you want in this website,let us know; we may already have it designed or we will modify a design to meet your requirements. In many cases the specifications in the catalog can be changed to include bore size, circuits number, higher current/voltage,flange, lead wire length,shielding,connectors,higher speed,IP68,military grade,higher temperature, mixed with pneumatic/hydraulic capability. Please ask if you don't see exactly what you need as only a small fraction of our Rion slip rings are included in this catalog!

For a detailed outline drawing/3D modal files of a specific model number, or to request a quotation, please contact your local sales representative or send an email to sales@rionsr.com